

P HE SERIES

KAISEN


Light-emitting diode module P2 HE 0.72W



MODULE DESIGNED
CHANNEL LETTERS



BEST FOR 3"-5" DEEP
CHANNEL LETTERS



RECOMMENDED DEPTH:
C-C DISTANCE RATIO



UP TO 120LM/W

HIGH EFFICIENCY
LED INSIDE



IP 67

DUST AND WATER
PROTECTED



86lm

HIGH BRIGHTNESS
86 LM PER MODULE



7000 K


7000 K
AND OTHER COLORS



10-YEAR PRODUCT
& 5-YEAR LABOR


TECHNICAL INFORMATION

LED type	2835
Input	12V DC
Color temperature	3000/4000/5000/7000/10000 K
Beam angle	165°
Protection level	IP 67
Center-to-center distance	7.09" (180 mm)
Working temperature	-22°F + 122°F
Available colors	● ● ● ●
Power	0.72 W 0.72 W 0.72 W 0.72 W
Light output	19 lm 25 lm 10 lm 86 lm
Fire protection level	V1

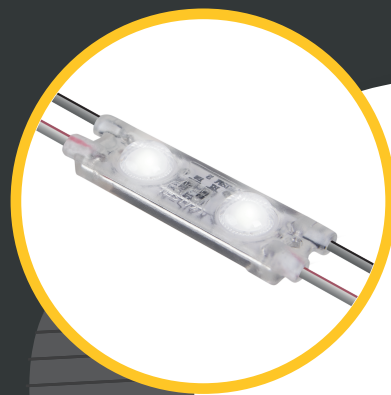


LIGHT DISTRIBUTION GRAPH

Beam angle is 165°




DIMENSIONS

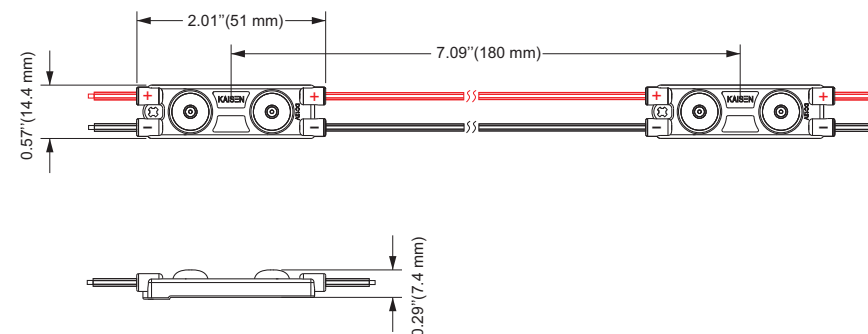

PACKAGING

Packing type	Chain	Package	Box
Quantity	20 pcs	100 pcs	1600 pcs
Weight	0.38 lbs	1.85 lbs	27.78 lbs

CONNECTION



LTD "KAISEN ELECTRIC" © All rights reserved