

TMAX SERIES


Designed for Light Boxes




FOR LIGHT BOXES



10 YEARS WARRANTY
10-YEAR PRODUCT & 5-YEAR LABOR



MIN
MAX
1:3 RATIO



170 lm/W




IP 67




7000 K

SERIES SPECIFICATIONS

LED type	2835
Input	24V DC
Color temperature	7000 K
Beam angle	175°
Protection level	IP 67
Working temperature	-22°F + 122°F
Efficacy	up to 170lm/W
Warranty	10-year product & 5-year labor

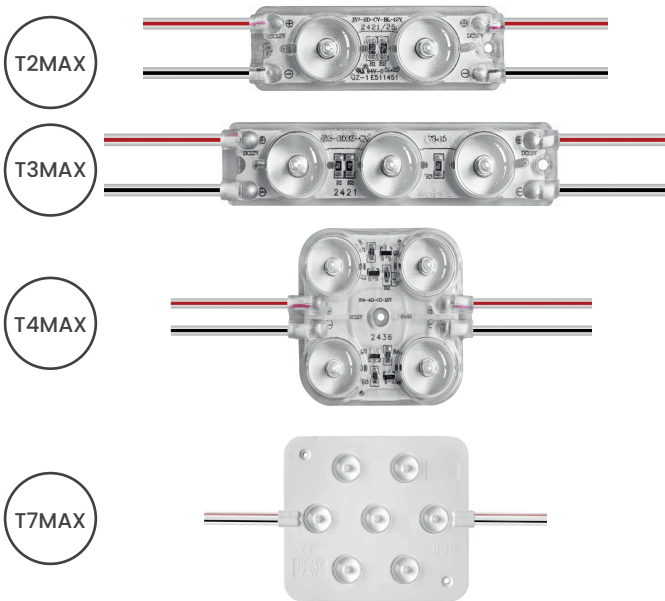

RECOMMENDED LAYOUT

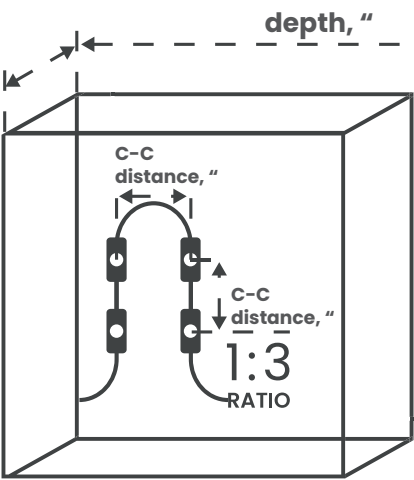

Model	Depth	Mods/ft	Single stroke width	Multi-row on-center spacing
T2MAX 24V	2"	2.0	6"	6"
	3"	1.5	9"	9"
	4"	1.5	12"	12"
T3MAX 24V	3"	1.5	9"	9"
	4"	1.5	12"	12"
	5"	1.0	15"	15"
T4MAX 24V	6"	1.0	18"	18"
	4"	1.0	12"	12"
	5"	1.0	15"	15"
	6"	1.0	18"	18"
T7MAX 24V	7"	0.75	21"	21"
	8"	0.75	24"	24"
	5"	1.0	15"	15"
	6"	1.0	18"	18"
	7"	1.0	21"	21"
	8"	0.6	24"	24"
	9"	0.6	27"	27"
	10"	0.6	30"	30"

*The result may vary based on face material and application. Please contact our team member to receive best recommendations.

5900 Balcones Drive, Suite 100, Austin, TX 78731 | sales@kaisenusa.com



▼ DOWNLOAD HERE ONLINE ▼

PUSH HERE!


KAISEN
www.kaisenusa.com

PRODUCT SPECIFICATION



Part number	Optimal depth	Wattage	Lumens per module	Module C-C	Modules per chain	Packaging
KM-T2MAX-W(1.0 W 70 K)	2"-4"	1,0 W	170 lm	220 mm	40	120 pcs / 3.7 lbs package 960 pcs / 30.03 lbs box
KM-T3MAX-W(1.5 W 70 K)	3"-6"	1.5 W	225 lm	310 mm	40	120 pcs / 5.0 lbs package 720 pcs / 30.43 lbs box
KM-T4MAX-W(2.0 W 70 K)	4"-8"	2.0 W	340 lm	400 mm	20	100 pcs / 6.0 lbs package 500 pcs / 30.34 lbs box
KM-T7MAX-W(7.0 W 70 K)	5"-10"	7.0 W	910 lm	500 mm	10	10 pcs / 2.01 lbs chain 180 pcs / 36.46 lbs box

CONNECTION


T2MAX

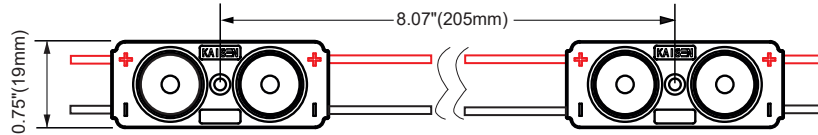


T3MAX



T4MAX

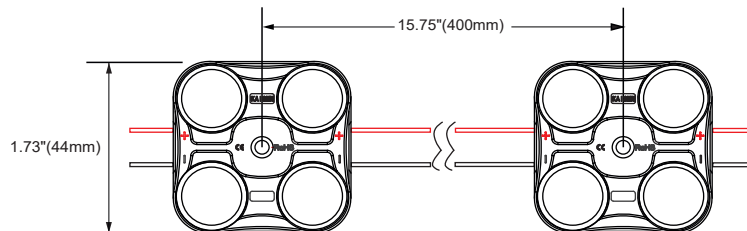

T7MAX

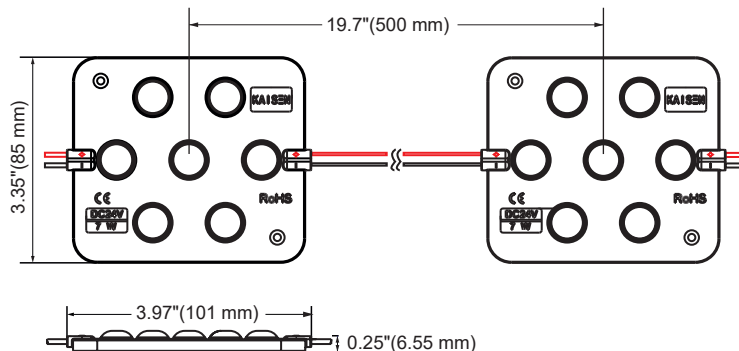

5900 Balcones Drive, Suite 100, Austin, TX 78731 | sales@kaisenusa.com

▼ DOWNLOAD HERE ONLINE ▼

PUSH HERE!



KAISEN
www.kaisenusa.com