

ULTRASONIC SERIES


Designed for Light Boxes and Letters




FOR CHANNEL LETTERS AND BOXES



10 YEARS WARRANTY
7-YEAR PRODUCT & 3-YEAR LABOR




MIN MAX
1:2 RATIO



160lm/W



IP 67



7000 K

SERIES SPECIFICATIONS

LED type	2835
Input	12V DC
Color temperature	7000 K
Beam angle	170°
Protection level	IP 67
Working temperature	-22°F + 122°F
Efficacy	up to 160lm/W
Warranty	7-year product & 3-year labor


S2



S3



RECOMMENDED LAYOUT

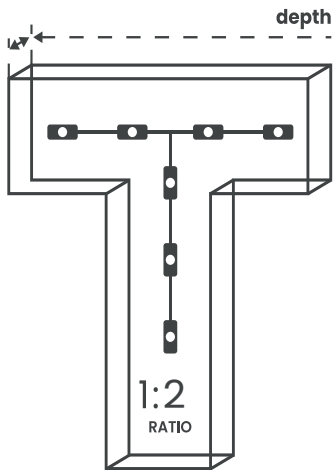

Model	Depth	Mods/ft	Single stroke width	Multi-row on-center spacing
S2	2"	3	4"	4"
	3"	2	6"	6"
	4"	2	8"	8"
S3	4"	1.5	8"	8"
	5"	1.5	10"	10"
	6"	1.5	12"	12"

Product	60 W		100W	
	Watts/ Mods	Max. Mods	Watts /Mod	Max. Mods
S2	0.72	80	0.72	135
S3	1.2	50	1.2	80

*The result may vary based on face material and application. Please contact our team member to receive best recommendations.

5900 Balcones Drive, Suite 100, Austin, TX 78731 | sales@kaisenusa.com

▼ DOWNLOAD HERE ONLINE ▼

PUSH HERE!


KAISEN
www.kaisenusa.com




PRODUCT SPECIFICATION

Part number	Optimal depth	Wattage	Lumens per module	Module C-C	Modules per chain	Packaging
KM-S2-0.72W-70K-HE-12V	2"-4"	0,72 W	115 lm	5.91"(150 mm)	500	500 pcs / 9.97 lbs
KM-S3-1.2W-70K-HE-12V	4"-6"	1.2 W	192 lm	7.87"(200 mm)	500	500 pcs / 13.36 lbs



S2

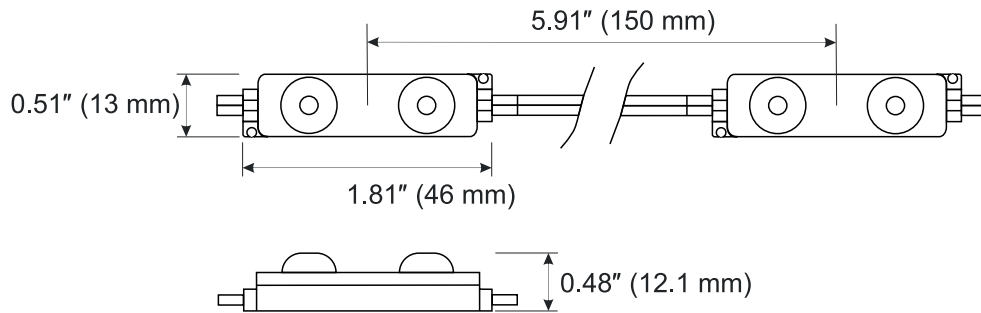

CONNECTION



S3

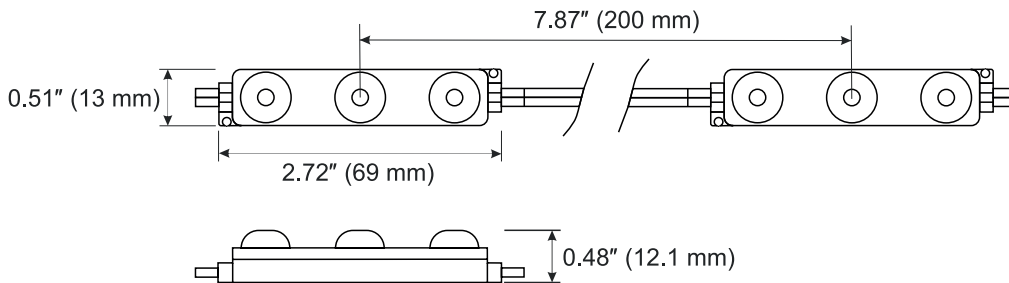

5900 Balcones Drive, Suite 100, Austin, TX 78731 | sales@kaisenusa.com



▼ DOWNLOAD HERE ONLINE ▼

PUSH HERE!

KAISEN
www.kaisenusa.com